


## AnyLynx™ 9000

Data communication anytime and anywhere: with AnyLynx you can easily and safely expand your IT-network and integrate distant locations or mobile devices in your private network.

With the AnyLynx product family AnyWeb offers a flexible data communication solution for mobile or fixed outdoor installations. The box withstands temperature extremes and vibrations and is ruggedly designed.

### AnyLynx™ 9000 – the mobile network

The AnyLynx 9000 has been especially developed for the deployment in vehicles. All connectors and the air ventilation are on the same side of the cube. The design of the rugged box offers a special protection for the plug-in connections. In a very compact body AnyLynx 9000 integrates Router, Switch, WLAN Access Point, WLAN Bridge, 3G Modem (1 or 2), GPS and a General Purpose Interface (GPIO).

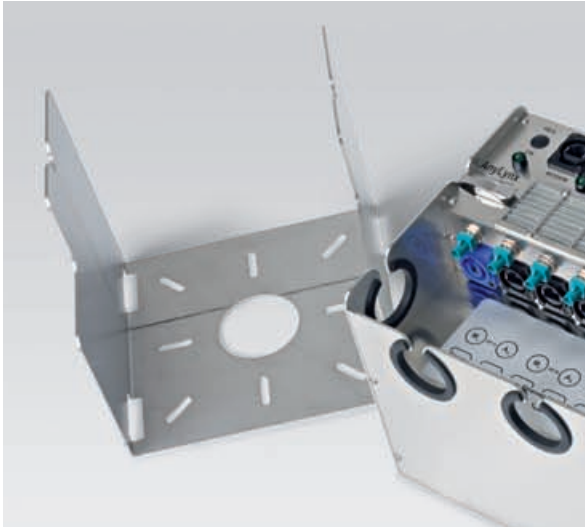

AnyLynx 9000 with Hull

Due to the numerous standard features the possible field of applications for AnyLynx 9000 is countless.

Typical deployment areas are police cars, ambulances, fire brigades, mobile command rooms or mobile office environments, such as mobile research units or gauging stations.

## Technical Data AnyLynx™ 9000

	AnyLynx 9000
<b>Communication Interface</b>	
ADSL	–
Cisco WLAN 802.11b/g (Access Point and Bridge)	2
3G (GPRS, EDGE, UMTS, HSPA)	
Cablynx (Sierra MC878x Modem)	1
<b>GPS</b>	
	1
<b>GPIO</b>	
Input	5
Output	2
<b>Cisco Router</b>	
IOS Advanced Enterprise	●
<b>Ethernet Switch</b>	
Number of Ports	4–5
VLAN/Trunk	1
<b>Assembly</b>	
Management (data link)	RJ45
Antenna Terminals (WLAN/3G)	Facra
Ethernet	RJ45
GPIO	RJ45
GPS	Facra
Dimensions	19x19x19 cm
Net Weight	5.9 kg
Net Weight incl. Hull	7.3 kg
<b>Operation Temperature</b>	
	–20 to +60°C
<b>Power Supply</b>	
DC	9–24 Volts
AC (External Adapter)	110–240 Volts
<b>Cisco Compatible*</b>	
	●

\* AnyLynx has tested compatible with the Cisco 3200 Series Wireless and Mobile Router. The Cisco Compatible logo signifies that AnyLynx has undergone interoperability testing by AnyWeb together with Cisco and a third-party test house based on testing criteria set by Cisco. AnyWeb is solely responsible for the support and warranty of its product. Cisco makes no warranties, express or implied, with respect to AnyWeb product or its interoperability with the listed Cisco product(s) and disclaims any implied warranties of merchantability, fitness for a particular use or against infringement.